




ASHA Series 65" / 75" / 86" / 98"

Interactive Flat Panel Display

Features of ASHA

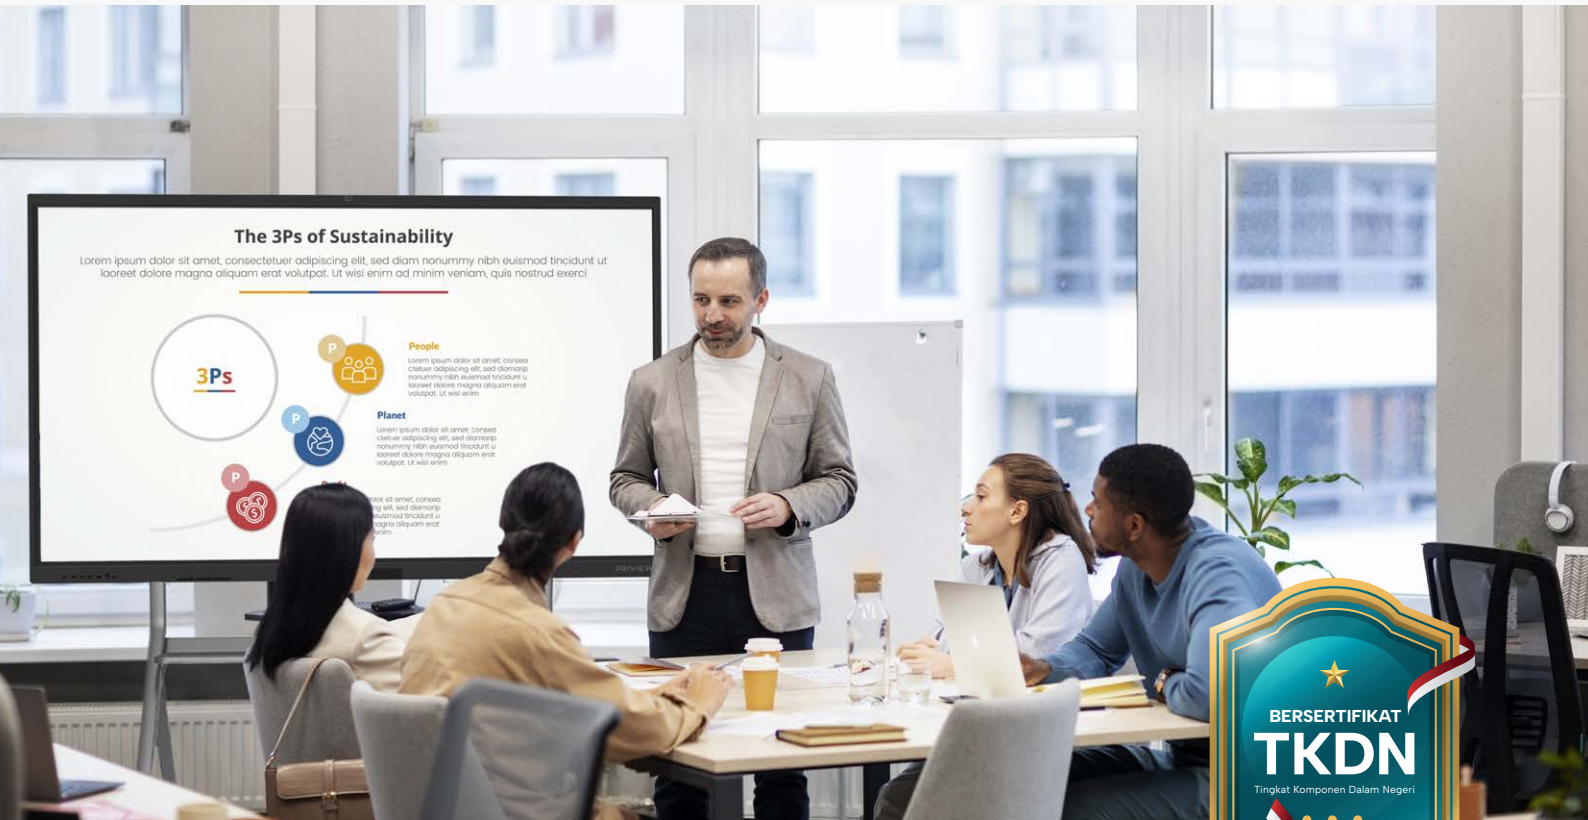

Android Versions

- Android 13.0
- 8 Gb / 128Gb



Wireless Screen Sharing

- Support multiple devices Screenshare
- Support Android/Windows/MAC/Chrome OS
- Bidirectional connectivity



Zero Bonding Technology

- With Natural Writing Experience
- 0.5mm Zero bonding gap
- Improve wide display view & view-angle



Integrated Camera & Microphone

- 48MP camera
- 8 array microphone
- AI tracking (voice tracking and face tracking)



Improved Touch Accuracy and Efficiency

- Reduce parallax and improve touch accuracy
- 20 point touch



Smart Pen Recognition

- Intelligent AI based writing prn
- Support



Screen Splitting

- Two applications running on the screen at the same time.



Cloud Drive

- Support Google Drive & One Drive



Technical Specifications.

Parameters	Size	ASH65PR	ASH75PR	ASH86PR	ASH98PR
Display Parameters	Backlight	D-LED	D-LED	D-LED	D-LED
	Active Display Area	1428.48 (H) x 803.52 (V)	1649.74 (H) x 927.94(V)	1895.04 (H) x 1065.96 (V)	2158.85(H) x 1214.35(V)
	Resolution	3840x2160(pixels,RGB)	3840x2160(pixels,RGB)	3840x2160(pixels,RGB)	3840x2160(pixels,RGB)
	Contrast Ratio	5000: 1	5000: 1	5000: 1	5000: 1
	Brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2
	Light Resistance	80KLux	80KLux	80KLux	80KLux
	Aspect Ratio	16:9	16:9	16:9	16:9
	Response time	8ms (typ.)	8ms (typ.)	8ms (typ.)	8ms (typ.)
	Viewing Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
	Led Life time	≥30,000 Hrs (min.)	≥30,000 Hrs (min.)	≥30,000 Hrs (min.)	≥30,000 Hrs (min.)
	Screen Protecctor	4mm Tempered AG Glass	4mm Tempered AG Glass	4mm Tempered AG Glass	4mm Tempered AG Glass
Camera	Camera	48MP with AI	48MP with AI	48MP with AI	48MP with AI
Microphone	Microphone	8 Mic Array	8 Mic Array	8 Mic Array	8 Mic Array
Audio	Speaker	15W x2	15W x2	15W x2	15W x 2
Power Parameters	Power	250W	300W	450W	500W
	Working Voltage	220V~50/60Hz	220V~50/60Hz	220V~50/60Hz	220V~50/60Hz
	Standby Power	≤ 0.5W	≤ 0.5W	≤ 0.5W	≤ 0.5W
Android OS	Android System	Android 13			
	RAM and ROM	8GB / 128GB			
	CPU /GPU	A55*4, Mali G52			
	WIFI	Built-in dual 2.4G/5G modules, supports wifi6			
Input & Output	Bluetooth	Build-in			
	Rear Connection	HDMI OUT*1, HDMI IN*2, TOUCH*1, USB3.0*3, MIC IN*1, Line OUT*1, RS232*1, AV IN*1, AV OUT*1, COAX OUT*1, LAN IN*1, LAN OUT*1, TF*1			
Touch Parameters	Front Connection	USB3.0*3, HDMI IN*1, TOUCH*1, Type-C*1			
	Touch Technology	Infrared technology (IR)			
	Touch Points	20 Touch Point			
	Inductive objects	Finger or pen			
	Acuracy	±1mm			
	Response time	≤10ms			
Environment	Operation System	Support Android/Windows			
	Storage & Working Temperature	Working Temperature: 0°C ~ 50°C, Storage Temperature: -20°C ~ 60°C			
	Storage & Working Humidity	10% ~90%			
Packing Parameters	Physic Size	1493.43*915.82*102.87mm	1715.66*1041.14*103.15mm	1961*1178.8*103.15mm	2222.46.8*1336.7*107.61mm
	VESA Size	600*400mm	600*500mm	800*600mm	1000*400mm
	Plywood Carton Size	1623*1065*215mm	1846*1190*215mm	2092*1329*215mm	2367*1500*280*mm
	Net Weight	39 kg	49 kg	63 kg	90.5Kg
	Gross Weight	50 kg	63 kg	80 kg	109Kg
Standard Configuration	Acceesories	Quick start guide ; Stylus Pen *2 ; Wall mounted bracket *1; Remote control* 1; Power cable 2M *1;			
	Windows OPS	Windows10 i5 (16Gb/256Gb) / Windows10 i7 (16Gb/512Gb)			
	Warranty	3 years warranty			

Office Address.

Head Office. Ruko Sampoerna Square No. 15, Jl. Raya Hankam, Jatisampurna – Bekasi 17433
Branch Office. Ruko Derwati Mas Estate No. 31, Jl. Raya Derwati, Rancasari – Bandung 40292

Follow Mandiri Artha Solusi on      

Contact us.

(021) 2281 3394 / WhatsApp. 0812 1111 2948
info@mandiriarthasolusi.co.id
www.mandiriarthasolusi.co.id