

SKY UV PRINTER SUV-1602H

Original Epson Head i3200-U1 2pcs



SUV-1602H

It has the function of variable ink droplets that can print ink into three different Sizes of ink drops once.

The grayscale printing technology can print out more precise color tones, exquisite and smooth gradient effects, bold and clear text lines, as well as intricate details without reducing the printing speed.

Epson original print head printing speed

Speed Model	Draft mode	Production mode	Quality mode
CMYK + CMYK	28m ² /h	24m ² /h	20m ² /h
CMYK + WHITE	14m ² /h	12m ² /h	10m ² /h

Printing width:1600mm



PH Configuration

2x i3200-U1 Heads



C
CYAN



M
MAGENTA



Y
YELLOW




K
BLACK



W
WHITE



V
VARNISH

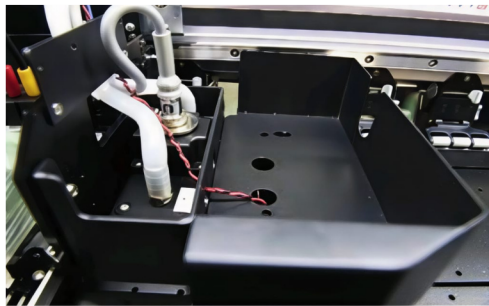

UV light intensity adjustable

UV light intensity can be adjusted, easily cope with a variety of different materials




Smart Media Detection

Automatically detects whether the printing media is used up, intelligent and worry-free




White ink stirrer

Prevention of white ink precipitation more smooth printing process

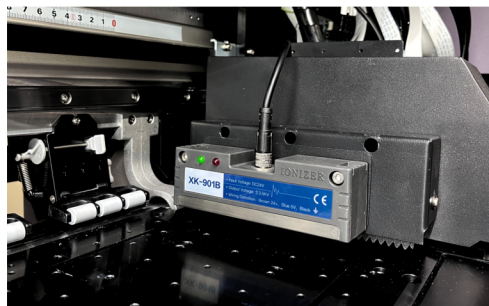


Static eliminator

Effectively avoiding the interference of static electricity on the print head and

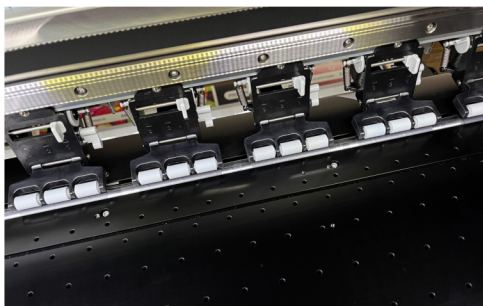

Three- position adjustable paper pressing wheels

Independently, resulting in smoother paper feeding

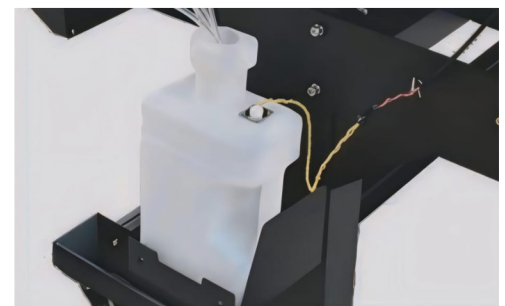

Ink Level Alarm

The waste ink bottle is equipped with a liquid level alarm to facilitate the timely cleaning of waste ink

MAIN TECHNICAL SPECIFICATION

Model	SKY UV PRINTER SUV-1602H		
Printhead Type	i3200-U1	Curing System	Water - cooling system + LED UV lamp
Number of Printheads	2 pcs	Operating language	Chinese/English
Printhead Height	2mm-3mm	Operating system	Windows 10/Win 7
Cleaning	Fully automatic cleaning	Working environment	Temperature range:18°C - 25°C Humidity range : 35% - 65% Rh
Ink Type	UV Ink-Medium Soft	Print interface	Ethernet
Ink Color	CMYK + CMYK / CMYK + WHITE	RIP software	Maintop
Cartridge Capacity	3000ml/color	Power parameters	AC-220V,50Hz/60Hz
Ink Supply	Positive pressure continuous ink supply	Power (W)	Printers 3200W, Chiller 800W
Print Width	1600 mm	Noises	Min<32dB, Max<=65dB
Loadable Coil Weight	80 kg (Max)	Machine size (LxWxH)	3312mm x 880mm x 1510mm (LxWxH)
Type of Medium	Materials such as glass film, PVC film, 3P cloth, wallpaper, leather, bamboo blinds, etc.	Net weight (kg)	310kg
Paper Take Up Device	Standard	Packing size (LxWxH)	3194mm x 1140mm x 814mm (LxWxH)
Total Weight (Kg)		318kg	